

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
11 August 2005 (11.08.2005)


PCT

(10) International Publication Number  
**WO 2005/072983 A1**

- (51) International Patent Classification<sup>7</sup>: B42F 13/26, 15/00 (74) Agent: WINCKELS, J.H.F.; Johan de Wittlaan 7, NL-Den Haag 2517 JR (NL).
- (21) International Application Number: PCT/NL2005/000072 (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 31 January 2005 (31.01.2005)
- (25) Filing Language: Dutch
- (26) Publication Language: English
- (30) Priority Data: 1025365 30 January 2004 (30.01.2004) NL
- (71) Applicant (for all designated States except US): Novem International B.V. [NL/NL]; Rivium Quadrant 90, NL-2909 LC Capelle a/d IJssel (NL). (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): LANGERAK, Alfred [NL/NL]; Molenweg 13, NL-3271 AM Mijnsheerenland (NL).

[Continued on next page]

(54) Title: STORAGE DEVICE WITH SUSPENSION ELEMENTS

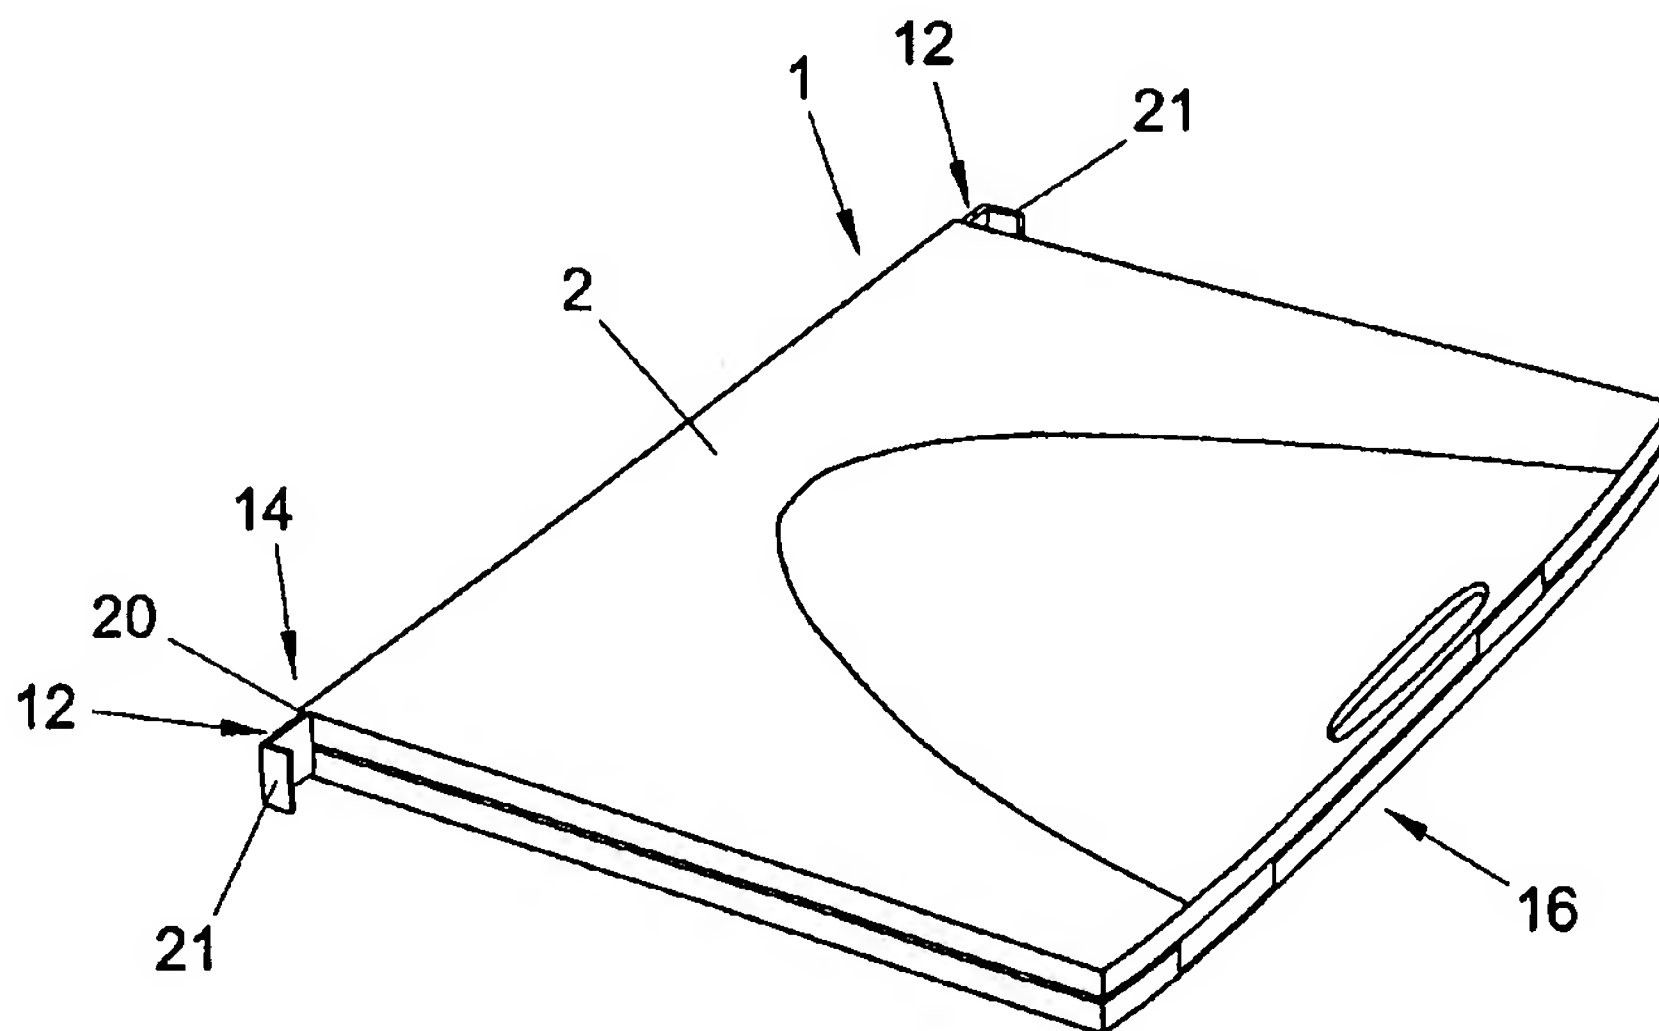

(57) Abstract: The invention relates to a storage device (1) provided with a front cover (2) and a back cover (3), pivotally connected to each other and/or to a spine (4) such that by pivoting the covers, the storage device (1) can be brought from an opened condition to a closed condition and vice versa, while against one of the covers and/or the spine a binder, in particular a ring binder, is provided while adjacent two opposite ends a suspension element (12) is provided which is movable between a first condition in which the suspension elements (12) extend within the storage device (1) in closed condition and a second condition in which they extend outside the storage device (1) in closed condition such that the storage device (1) can be suspended by the suspension elements (12).

WO 2005/072983 A1



**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*